


PN10 Weld Neck Flange (304/L)

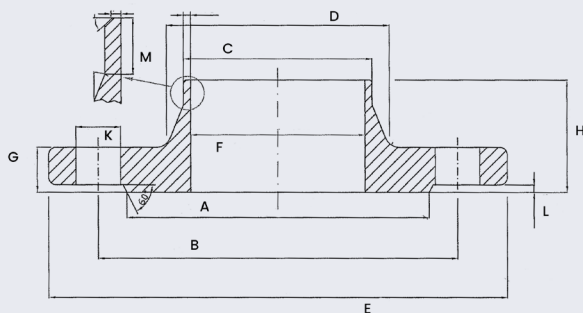

This flange conforms to EN 1092-1 and is available in both 316/L and 304/L.

Full material traceability is available and 3.1B certification can be provided upon request.

Bolt kit sizes shown in the above table are for bolting two flanges together including the thickness of a gasket. If using a wafer pattern valve, longer bolts will be required.

PIPE SIZE	DN	SCHEDULE 10	A	B	C	D	E	F SCH10	G	H	K	L	M	BOLT	KG EACH	BOLT KIT CODE
8"	200	F1028.0 - 304	268	295	219.1	234	340	211.58	24	62	22	3	16	8XM20	11.05	BK10
10"	250	F10210.0 - 304	320	350	273	292	395	264.62	26	68	22	3	16	12XM20	15	BK11
12"	300	F10212.0 - 304	370	400	323.9	342	445	314.76	26	68	22	4	16	12XM20	16.65	BK11
14"	350	F10214.0 - 304	430	460	355.6	385	505	346.04	26	68	22	4	16	16XM20	22.95	BK11
16"	400	F10216.0 - 304	482	515	406.4	440	565	396.84	26	72	26	4	16	16XM24	28.25	BK15

**** Dimensions subject to change - Please contact us if critical ****

Other products you might like...

We also keep Slip-On, Blind and Threaded flanges to this standard



We also keep Gaskets to suit all our Flanges in both EPDM and Non-Asbestos materials

